

Radio pairing of the multisensor and the Power Control Unit

Each multi-sensor assembly and PCU (power control unit) is coupled to ensure that there is no “crosstalk” with other Airis Sense installations nearby. However, if a multi-sensor or PCU needs to be replaced, it will be necessary to pair the new PCU and multi-sensor combination before they can work together.


Necessary Tools and Materials



1x flat-head screwdriver


Stage 1/7 :

Turn off the power to the hob at the circuit breaker.

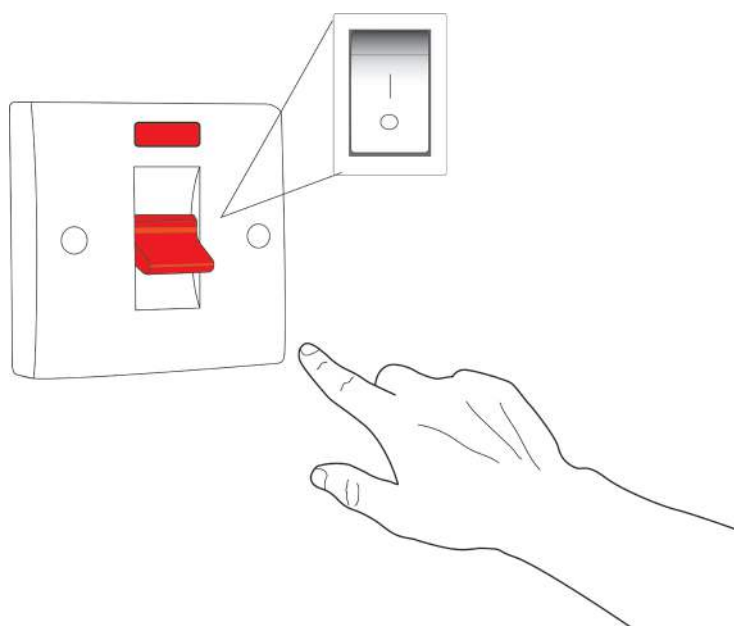


Stage 2/7 :

First, remove the black base from the white case. To do this, use a screwdriver or similar object and gently press into the slot on either side of the case before gently prising it apart.

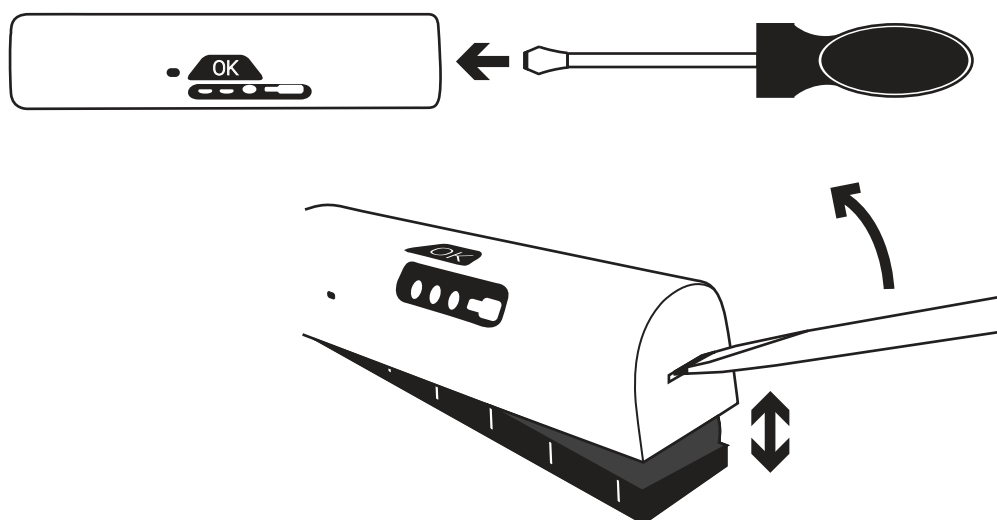


Stage 3/7 :

Next, remove the multisensor from the white casing by gently parting both sides of the white casing with your fingers and pushing on the other side using the “OK” button. Place 3 batteries in the back of the multisensor.

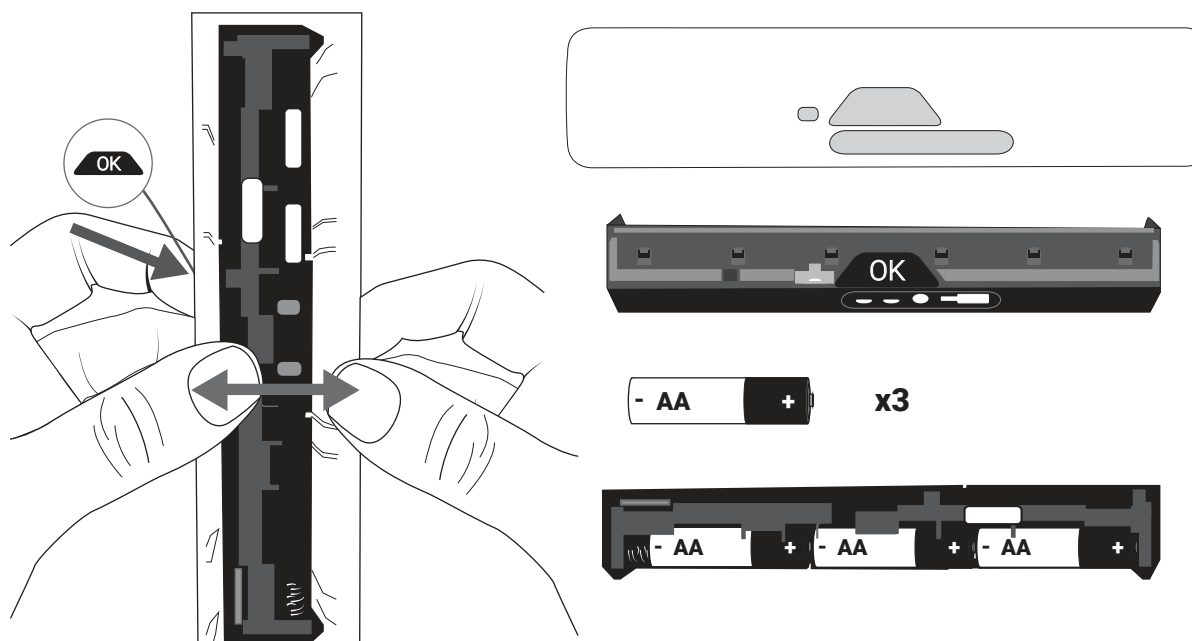

Stage 4/7 :

Press and hold button 2 (right side/multi-sensor end) for approximately 5 seconds until the OK button lights up white.

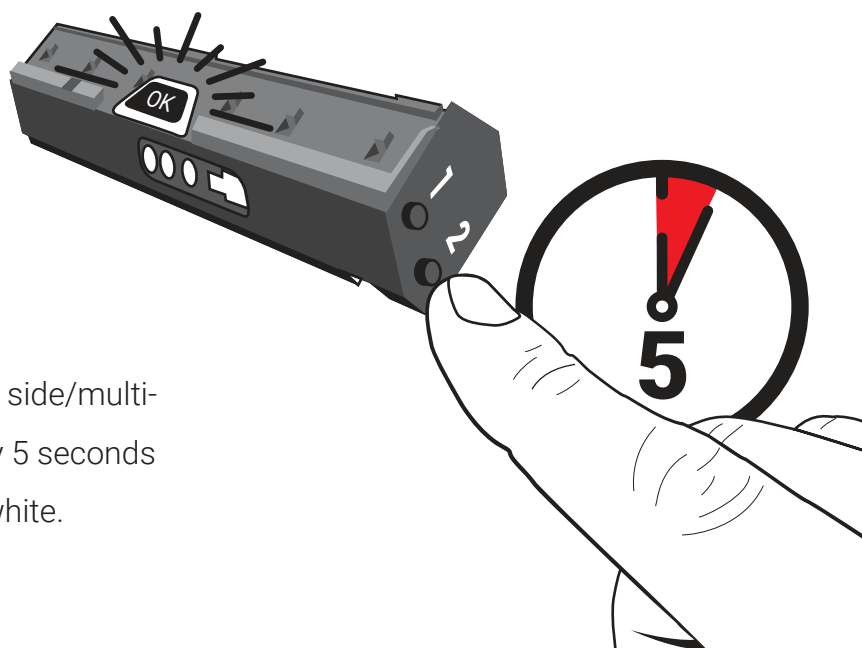



Stage 5/7 :

Press and release the OK button – the light will alternate between purple/blue.



Stage 6/7 :

Power the PCU back on. The multi-sensor will respond with 3 quick beeps to confirm pairing is complete.

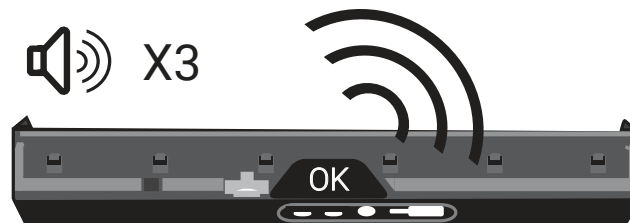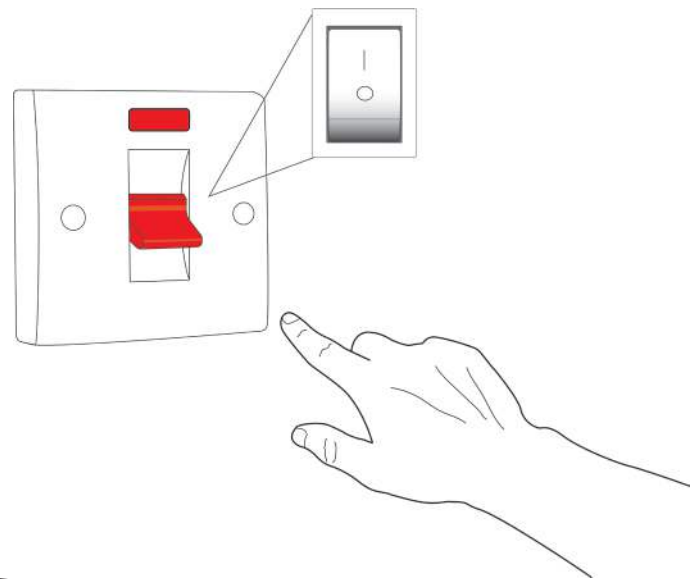

Stage 7/7 :

Replace the multisensor in the white housing. Reinstall all batteries and reattach the multisensor to the wall mount

Note: approximately 2.5 minutes after the start of the next cooking session, the multisensor reestablishes its pitch and roll position on the wall, so it is important to put the multisensor back in the correct position as soon as this pairing process is complete.

